


P58

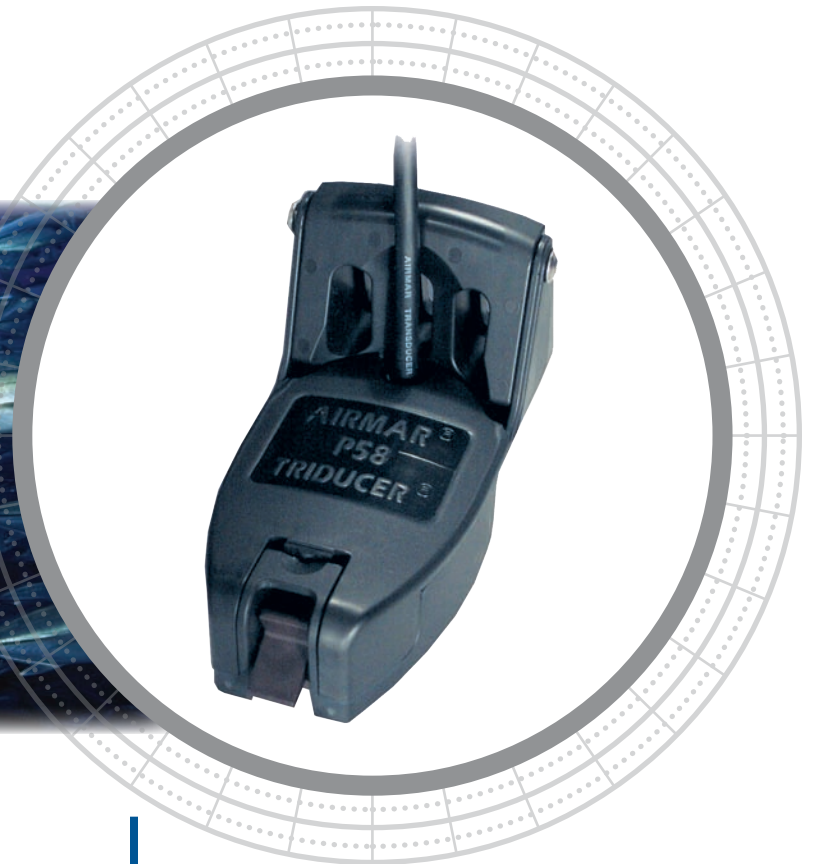

One Small Sensor, Three Big Features

The P58 TRIDUCER® Multisensor offers dual-frequency depth, speed, and temperature functionality at an extremely attractive price. The 50 kHz and 200 kHz transom-mount design incorporates innovative features such as a recessed waterflow channel for improved paddlewheel accuracy. Few parts make the installation simple, and its compact size is favorable to owners of small boats.

Transom-Mount TRIDUCER® Multisensor 600 W


Features

- Recommended for small inboard/outboard boats
- Depth, speed, and temperature
- Includes temperature sensor
- Square four-blade paddlewheel improves linearity
- Accommodates transom angles between 2° and 22°



Sensing Technology

www.airmar.com

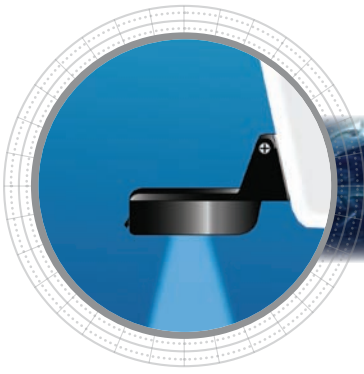

Technical Information

50/200 kHz-A

Number of Elements and Configuration	○	
Beamwidth (@-3 dB)	45°	11°
RMS Power (W)	600 W	600 W
TVR	153 dB	173 dB
RVR	-164 dB	-182 dB
FOM*	-33	-20
Q	24	30
Impedance	200 Ω	375 Ω

MAXIMUM DEPTH RANGE

50 kHz	200 kHz
235 m to 353 m (800' to 1,200')	118 m to 206 m (400' to 700')

BEAM DIAMETER VS DEPTH

Depth	50 kHz	200 kHz
30 m (100')	25 m (83')	6 m (21')
122 m (400')	101 m (331')	27 m (84')
244 m (800')	202 m (663')	51 m (168')
305 m (1,000')	252 m (828')	64 m (210')

SPECIFICATIONS

Weight: 0.5 kg (1.1 lb)

Hull Deadrise Angle: 2° to 22°

Acoustic Window: Layered plastic urethane (LPU)

DIMENSIONS

